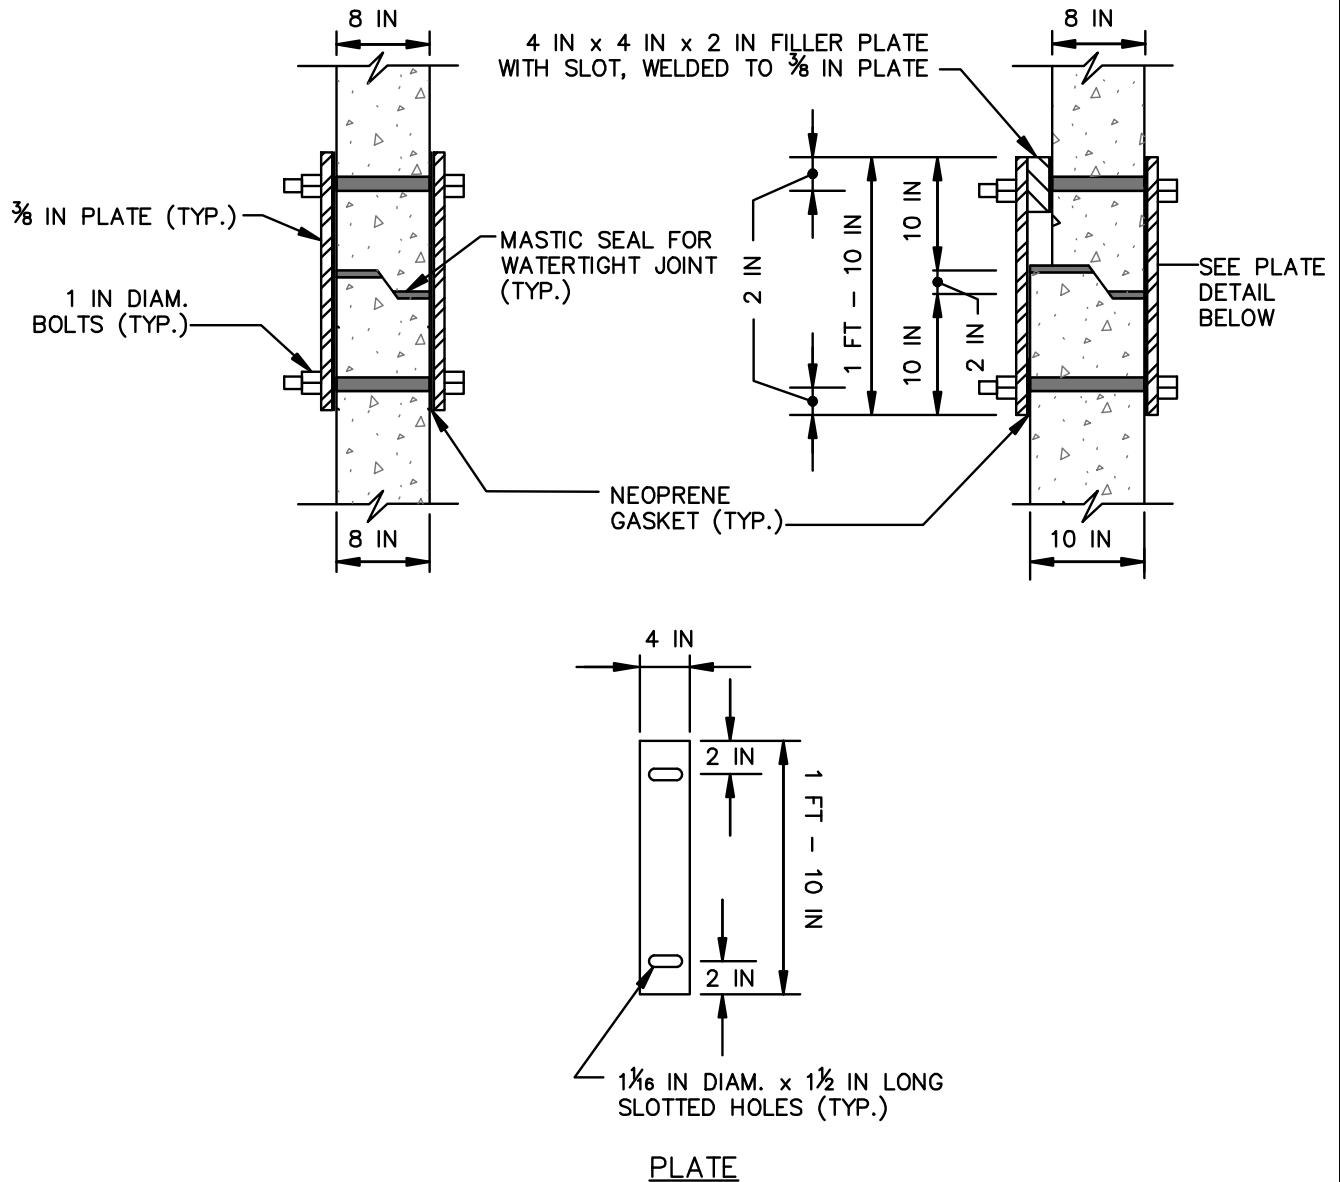


DETAIL G-2-8 PRECAST RISER CONNECTOR**CONSTRUCTION SPECIFICATIONS**

1. FABRICATE PLATE CONNECTORS FROM STAINLESS STEEL CONFORMING TO ASTM A666-72, GRADE A OR B.
2. USE TYPE 304 STAINLESS STEEL FOR BOLTS.
3. PROVIDE CONNECTORS AT CENTERLINE OF EACH PRECAST BOX FACE. FOR MANHOLES PROVIDE FOUR PLATES SPACED AT 90°.

MARYLAND STANDARDS AND SPECIFICATIONS FOR SOIL EROSION AND SEDIMENT CONTROL